



Product Details

PORTABLE SOLAR PANELS

SPC-TF-M-2*55W

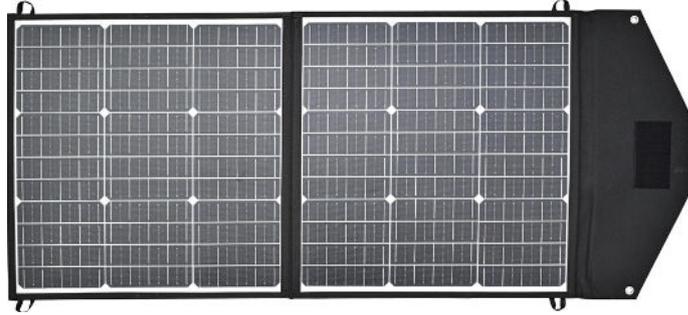

Module Diagram

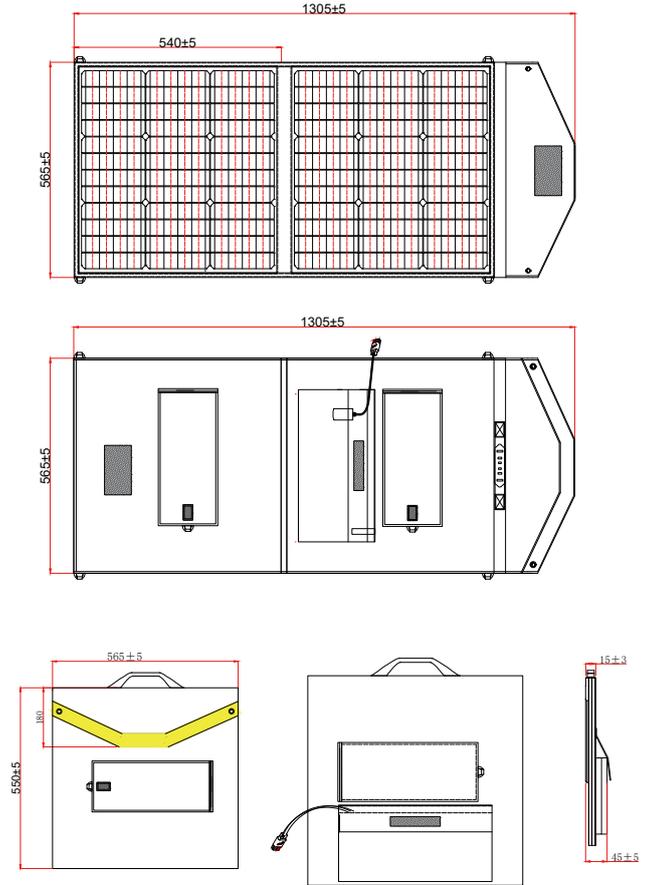

Electrical Characteristics


Maximum power(Pmax)	110W
Open-circuit voltage(Voc)	23.3V
Voltage at Pmax(Vmp)	19.8V
Short-circuit current(Isc)	5.89A
Current at Pmax(Imp)	5.56A
Cells Efficiency(%)	24.80%
The maximum system voltage	100V DC(IEC)
Power temperature coefficient	-0.38%/°C
Voltage temperature coefficient	-0.36%/°C
Current temperature coefficient	0.07%/°C
Output power tolerance	±5%
Operating Temperature	-10°C~60°C

Specifications

Solar cell brand	Monocrystalline
No.of cells and connections	9(3*3)
Folding size	565 x 550 x 15mm
Unfold Size	1305 x 560 x 4mm
Weight	3.5KG
Output cable	Anderson
Approvals	IP53
Certifications	CE, ROHS
Warranty	2 year and service life 8 years

Product Introduction

Sungold SPC-TF series products are popular solar folding bag styles in the market. They are made of polymer materials and have high flexibility and strength. Optional ETFE surface and diamond surface, beautiful and fashionable surface. OEM according to your requirements. All-in-one synthetic fiber stitching process for longer life, making it best for those with RVs, campers and off-grid adventures.

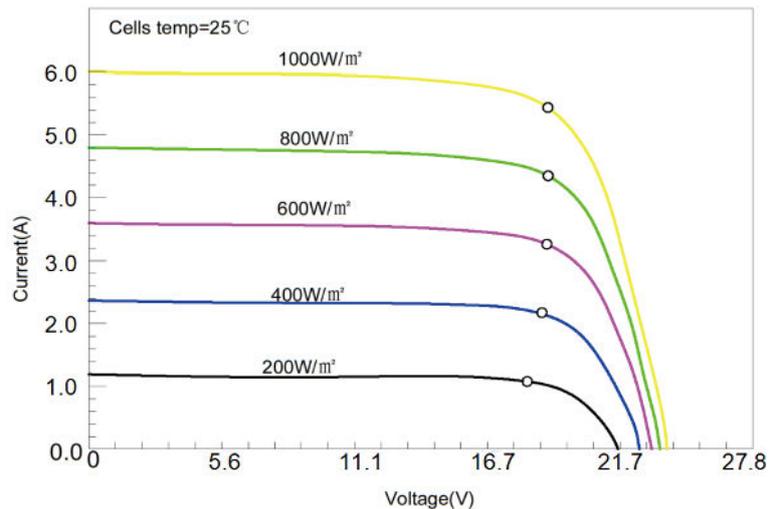

*SUNGOLD offer customize service, please refer to our website or ask SUNGOLD workers for more sizes and the latest parameters.